

# MGate 5217 Series

## 2-port Modbus RTU/ASCII/TCP-to-BACnet/IP gateways



### Features and Benefits

- Supports Modbus RTU/ASCII/TCP Client (Master) / Server (Slave)
- Supports BACnet/IP Server / Client
- Supports 600 points and 1200 points models
- Supports COV for fast data communication
- Supports virtual nodes designed to make each Modbus device as a separate BACnet/IP device
- Supports quick configuration of Modbus commands and BACnet/IP objects by editing an Excel spreadsheet
- Embedded traffic and diagnostic information for easy troubleshooting
- Built-in Ethernet cascading for easy wiring
- Industrial design with -40 to 75°C operating temperature range
- Serial port with 2 kV isolation protection
- Dual AC/DC power supply
- 5-year warranty

### Certifications



## Introduction

The MGate 5217 Series comprise 2-port BACnet gateways that can convert Modbus RTU/ASCII/TCP Server (Slave) devices to BACnet/IP Client system or BACnet/IP Server devices to Modbus RTU/ASCII/TCP Client (Master) system. Depending on the size and scale of the network, you can use the 600-point or 1200-point gateway model. All models are rugged, DIN-rail mountable, operate in wide temperatures, and offer built-in 2-kV isolation for serial signals.

### Easy Configuration Via Web Console and Excel Spreadsheet

The MGate 5217 Series comes with an intuitive UI design to make configuration easy. With that, you can easily access protocol conversion modes and finish the configuration in a few steps instead of installing an additional engineering utility in your computer. Besides, the MGate can generate Modbus commands and BACnet/IP objects by importing an Excel spreadsheet, which makes it easy to edit them.

### Modbus and BACnet/IP Protocol Traffic Monitor and Diagnostics

The MGate 5217 gateways support Modbus and BACnet/IP Protocol Traffic Monitor and Diagnostics for easy troubleshooting, especially during the installation stage. Communication issues could be caused by incorrect software parameters, such as the wrong slave ID and register address, or an incorrect command configuration. With Diagnostics, you can check the communication status and view values at a glance. With Modbus/BACnet Protocol Traffic Monitor, you can check the captured data and easily identify the root cause.

## Specifications

### Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector)	2 Auto MDI/MDI-X connection
Magnetic Isolation Protection	1.5 kV (built-in)

## Ethernet Software Features

Industrial Protocols	Modbus TCP Client (Master) / Server (Slave) BACnet/IP Server / Client
Configuration Options	Web Console (HTTP/HTTPS) Device Search Utility (DSU) Telnet Console
Management	ARP DHCP Client DNS HTTP HTTPS SMTP SNMP Trap SNMPv1/v2c/v3 TCP/IP Telnet UDP NTP Client
MIB	RFC1213, RFC1317
Time Management	NTP Client

## Serial Interface

No. of Ports	2
Connector	DB9 male
Serial Standards	RS-232/422/485
Baudrate	50 bps to 921.6 kbps
Data Bits	7, 8
Parity	None Even Odd Space Mark
Stop Bits	1, 2
Flow Control	RTS Toggle (RS-232 only) RTS/CTS DTR/DSR
RS-485 Data Direction Control	Automatic Data Direction Control (ADDC)
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	120 ohms
Isolation	2 kV (built-in)

## Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

## Serial Software Features

Industrial Protocols	Modbus RTU/ASCII Client (Master) Modbus RTU/ASCII Server (Slave)
----------------------	---

### Modbus RTU/ASCII

Mode	Client (Master) Server (Slave)
Functions Supported	1, 2, 3, 4, 5, 6, 16
Max. No. of Commands	MGate 5217I-600-T: 600 MGate 5217I-1200-T: 1200

### Modbus TCP

Mode	Client (Master) Server (Slave)
Functions Supported	1, 2, 3, 4, 5, 6, 16
Max. No. of Server Connections	32
Max. No. of Commands	MGate 5217I-600-T: 600 MGate 5217I-1200-T: 1200

### BACnet/IP

Mode	Client Server
Memory Size	MGate 5217I-600-T: 600 points MGate 5217I-1200-T: 1200 points
Supported BACnet Object	Binary Input Binary Output Binary Value Analog Input Analog Output Analog Value Multi-state Input Multi-state Output Multi-state Value Integer Value Positive Integer Value

### Security Functions

Authentication	Local database
Encryption	HTTPS AES-128 AES-256 SHA-256
Security Protocols	SNMPv3 SNMPv2c Trap HTTPS (TLS 1.2)

### Power Parameters


Input Voltage	24 VAC 12 to 48 VDC
Input Current	300 mA @ 24 VAC 510 mA @ 12 VDC
Power Connector	Screw-fastened Euroblock terminal

## Relays

Contact Current Rating	Resistive load: 1 A @ 30 VDC
<b>Physical Characteristics</b>	
Housing	Plastic
IP Rating	IP30
Dimensions (without ears)	29 x 89.2 x 118.5 mm (1.14 x 3.51 x 4.67 in)
Dimensions (with ears)	29 x 89.2 x 124.5 mm (1.14 x 3.51 x 4.90 in)
Weight	380 g (0.84 lb)
<b>Environmental Limits</b>	
Operating Temperature	-40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
<b>Standards and Certifications</b>	
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m IEC 61000-4-4 EFT: Power: 4 kV; Signal: 2 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 10 V IEC 61000-4-8 PFMF IEC 61000-4-11
Safety	UL 60950-1 UL 62368-1 IEC 60950-1 IEC 62368-1
Freefall	IEC 60068-2-32
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6 IEC 60068-2-64
International Approval	KC
<b>MTBF</b>	
Time	1,277,500 hrs
Standards	Telcordia Standard SR-332
<b>Warranty</b>	
Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>
<b>Package Contents</b>	
Device	1 x MGate 5217 Series gateway
Documentation	1 x quick installation guide 1 x warranty card

## Dimensions

Unit: mm (inch)

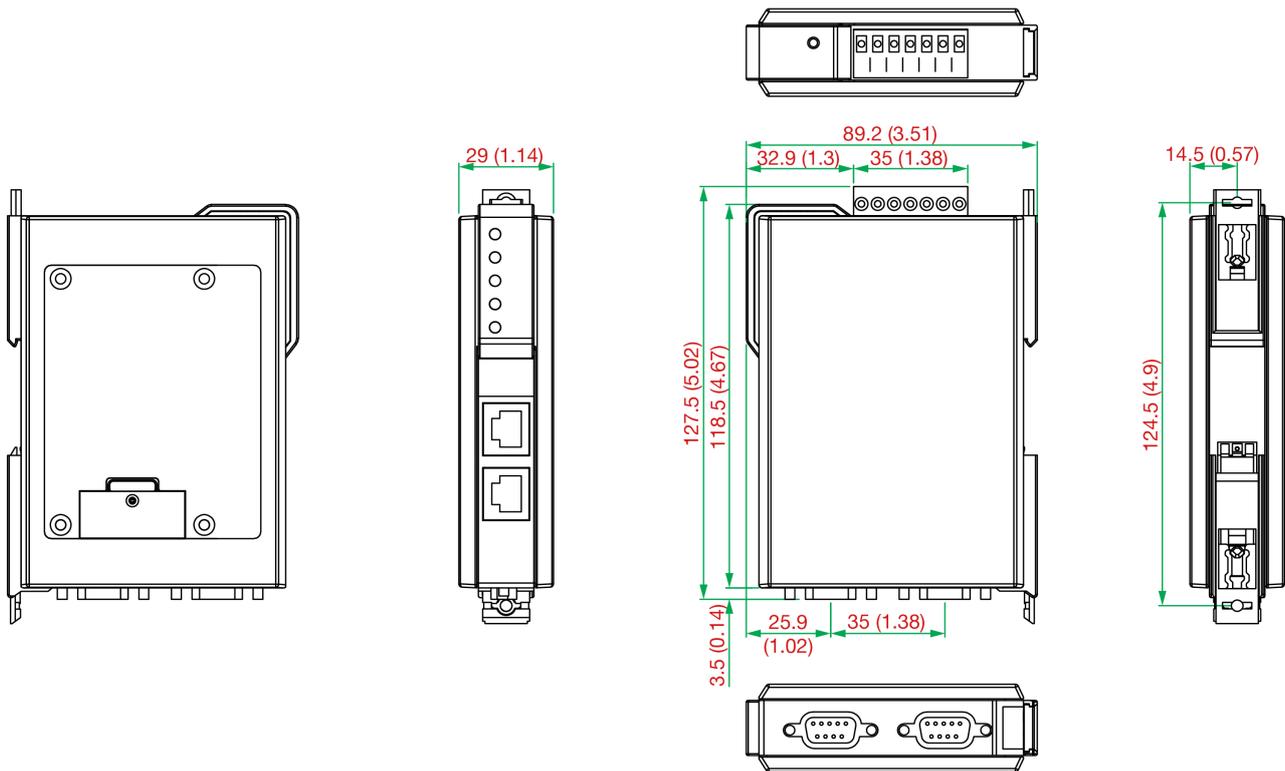

## Ordering Information

Model Name	Data Points
MGate 52171-600-T	600
MGate 52171-1200-T	1200

## Accessories (sold separately)

### Cables

CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm

### Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
-----------------	--

### Power Cords

CBL-PJTB-10	Non-locking barrel plug to bare-wire cable
-------------	--

© Moxa Inc. All rights reserved. Updated Jun 02, 2025.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.